


FEATURES


- **Clipped Sine Wave Output**
- **Optional Voltage Control for Frequency Tuning [VCTCXO]**
- 7.0mm x 5.0mm Surface Mount Package
- Frequency Range 5 – 52 MHz
- Fundamental Crystal Design
- Frequency Stability, Options from, $\pm 0.5\text{ppm} \sim \pm 2.5\text{ppm}$
- Operating Voltage, +2.8Vdc \sim +5.0Vdc
- Operating Temperature to -40°C to +85°C
- Tape & Reel Packaging Standard, EIA-418
- **RoHS/Green Compliant [6/6]**

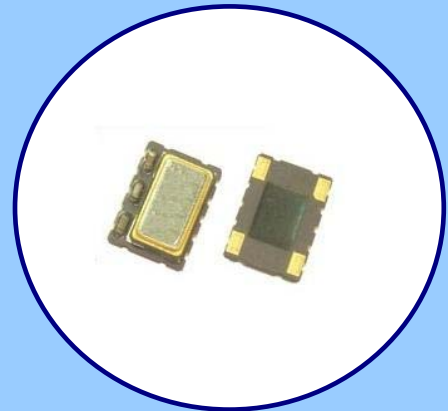

APPLICATIONS

The Model 585 is a quartz based analog TCXO with a Clipped Sine output and optional frequency tuning. M585 is suitable for applications such as wireless communications, base stations, small cells, broadband access and test equipment.

ORDERING INFORMATION

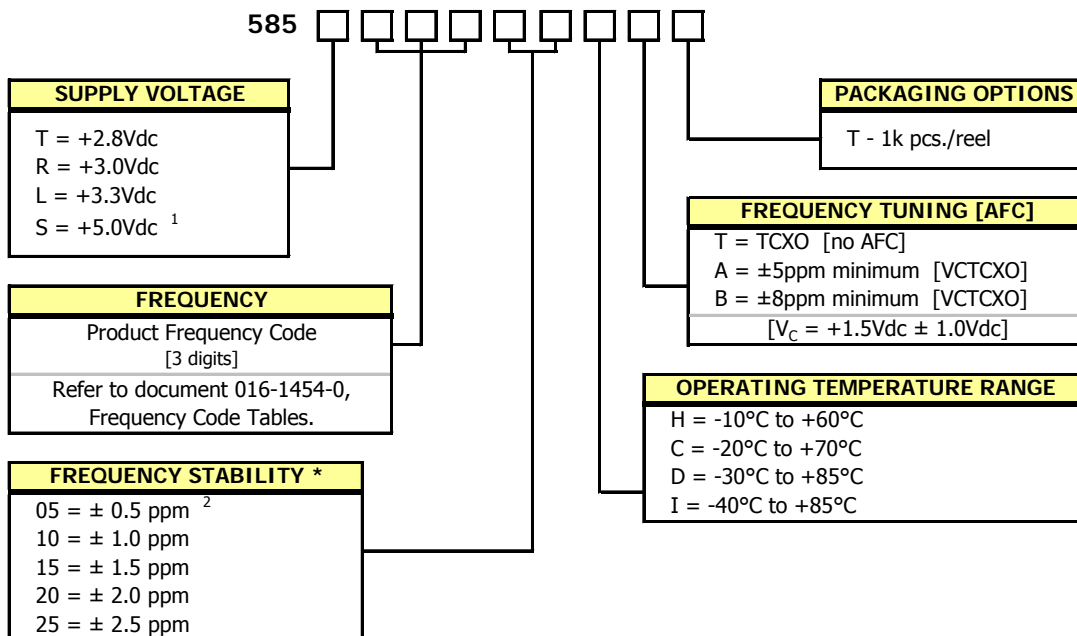

* Frequency vs. Temperature Only

1] Limited availability. Consult factory.

2] Only available with temperature range codes "H" and "C".


**Not all performance combinations and frequencies may be available.
Contact your local CTS Representative or CTS Customer Service for availability.**

ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Maximum Supply Voltage	V_{CC}	-	-0.5	-	6.0	V
Maximum Control Voltage	V_C	-	-0.5	-	V_{CC}	V
Storage Temperature	T_{STG}	-	-55	-	+125	°C
Frequency Range	f_0	Std frequencies listed in Ordering Information	5	-	52	MHz
Frequency Stability	$\Delta f/f_0$	Frequency vs. Temperature Only	0.5,1.0, 1.5,2.0,2.5			± ppm
Frequency Stability vs. Initial Calibration vs. Reflow Shift vs. Supply Voltage vs. Load vs. Aging vs. Aging	-	@ +25°C 1 hour after reflow ±5% change ±10% change 1st year 10 year [Except stability code 05]	-	-	1.0 2.0 0.1 0.2 1.0 8.0	± ppm
Operating Temperature Order Code 'H' Order Code 'C' Order Code 'D' Order Code 'I'	T_A	-	-10 -20 -30 -40	+25	+60 +70 +85 +85	°C
Supply Voltage Order Code 'T' Order Code 'R' Order Code 'L' Order Code 'S'	V_{CC}	±5%	2.66 2.85 3.14 4.75	2.8 3.0 3.3 5.0	2.94 3.15 3.47 5.25	V
Supply Current	I_{CC}	-	-	-	3.5	mA
Control Voltage	V_C	-	0.5	1.5	2.5	V
Frequency Tuning [VCTCXO Only]	-	$V_C = 1.5V \pm 1.0V$	A = 5 minimum B = 8 minimum			± ppm
V_C Input Impedance	Z_{V_C}	-	100	-	-	kOhm
Output Waveform		AC coupled Clipped Sinewave				
Output Voltage Levels	V_O	-	0.8	-	-	Vp-p
Output Load	$R_L // C_L$	-	10 kOhm // 10 pF			
Start Up Time	T_S	-	-	-	2	ms
Phase Noise ¹	-	-				dBc/Hz

Notes:

1. Phase Noise performance may vary based on output frequency. See example plot at 10 MHz below.

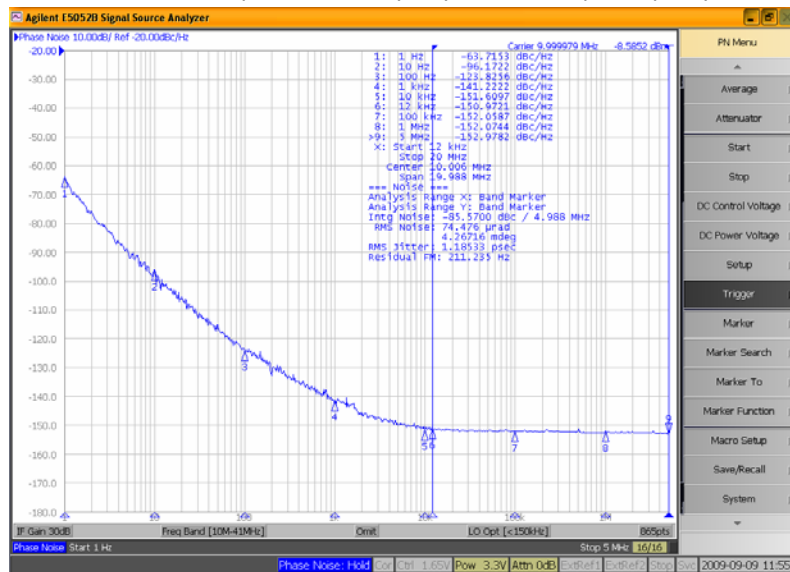

TEST CIRCUIT – Clipped Sine Load

* DC-Cut Capacitor: Add 1000pF capacitor between the TCXO output and input of load.

